

1650-k




HYDROLIFT

BORN TO LIFT


1650-K	K1	K2
LOADING GROUP B3		
LOAD MOMENT	16.5 tm	16.3 tm
HYDRAULIC REACH	6.2 m	8.2 m
SLEWING TORQUE	18.3 KNm	18.3 KNm
SLEWING ANGLE	400 deg	400 deg
HEIGHT ABOVE CHASSIS	2260 mm	2260 mm
WIDTH FOLDED	2490 mm	2490 mm
STABILIZER SPREAD, STANDARD	5730 mm	5730 mm
WEIGHT OF CRANE INCLUDING STABILIZERS	1960 kg	2100 kg
WORKING PRESSURE	31.5 Mpa	31.5 Mpa
PUMP PERFORMANCE	40-60 L/min	40-60 L/min
OIL TANK CAPACITY	80 L	80 L

1650-K1

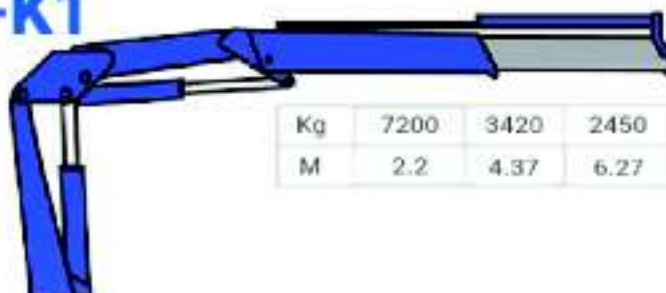


Kg	7200	3420	2450
M	2.2	4.37	6.27

1650-K2

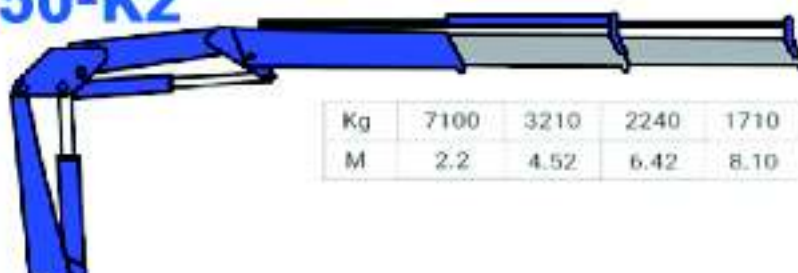

Kg	7100	3210	2240	1710
M	2.2	4.52	6.42	8.10

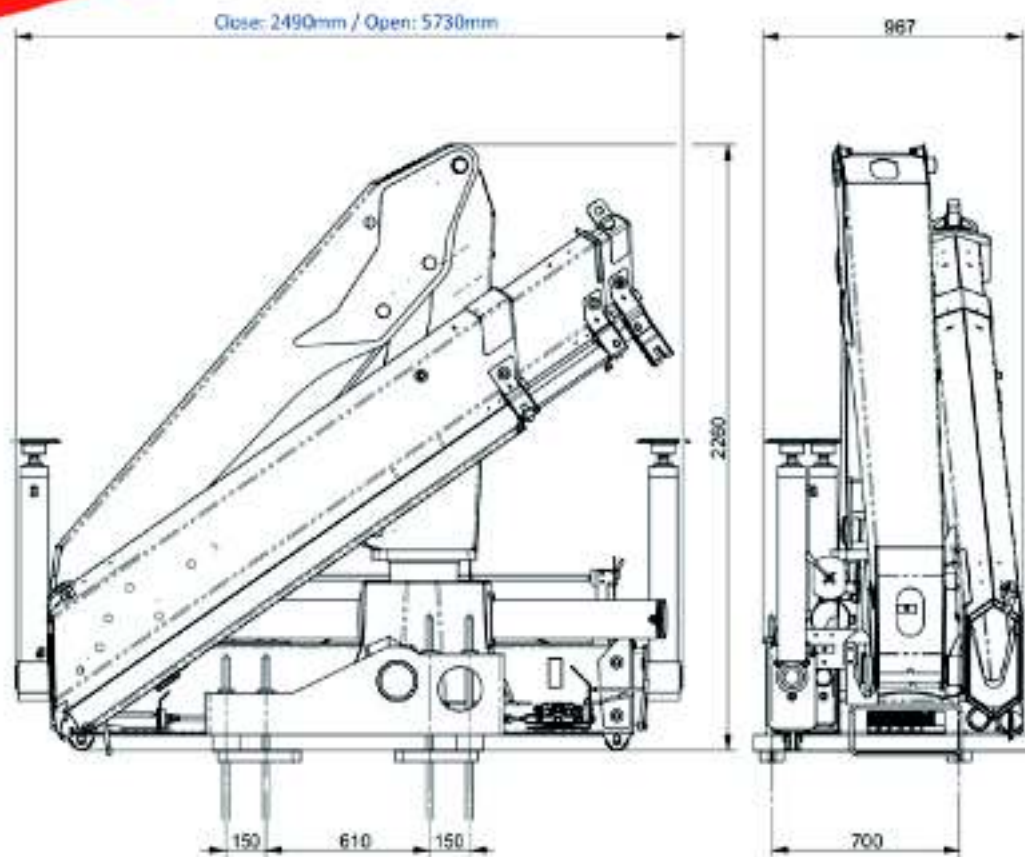

OPTIONS



Auger



Attachment



Cooler



personal Basket



Radio Remote control



Winch



HYDROLIFT

BORN TO LIFT



No. 47, 15th Cross,
Doddanna Industrial Estate,
Peenya 2nd Stage,
Bangalore - 560 091, India.



www.iigpgroup.com



isprasad@iigpgroup.com
marketing@iigpgroup.com